Specification Sheet SS-DG-0210 February 2010

The CHATILLON® DG Series mechanical force gauge is ideal for a wide range of force testing applications up to 500 lbf (2.5 kN). Based on our popular DPPH Series force gauge, the DG Series features a larger, 2.25-inch dial for improved resolution and readability, peak hold button, durable plastic housing, universal mounting plate, ergonomic shape and improved accuracy of ±0.5% of full scale. The DG gauge is an excellent, economical solution for tensile or compression testing.

The DG Series may be used as a hand-held device or equipped with an optional handle set for two-hand operation. It is ideal for test stand applications, and when combined with the MT500 Series mechanical test stand, offers you a versatile, economic test system with a capacity of up to 500 lbf (2.5 kN).

The DG Series features an an easy to read concentric dial that measures clockwise only. Dial rotates 360-degrees for taring. A peak hold switch captures peak readings and can be easily and quickly returned to zero. A mechanical overload feature protects the gauge from damage. Available in lbf, kgf or N units of measure. DG Series gauges come complete with protective carrying case and a set of stainless steel attachments. A Certificate of Calibration with NIST Data is supplied standard.

Features

- Three Graduation Styles
 - LBF
 - KGF
 - Newtons
- Tensile (Pull) and Compression (Push) Testing
- Peak Load Switch
- Tare Ring
- Intrinsically Safe
- NIST Calibration with Data
- 2 Year Warranty

Specifications

Accuracy: ±0.5% of Full Scale

Overload Capacity: 110% of Rated Capacity

Maximum Overload: 150% of Rated Capacity

Tare Capacity: 10% of Rated Capacity

Dial Resolution: 0.5% of Full Scale

Deflection (Full Scale): 10mm (.394 inches)

Operating Temperature: 40°F to 110°F

5°C to 45°C

Instrument Weight: 4.7 lbs (0.68 kg)
Shipping Weight: 8.4 lbs (3.80 kg)









Ordering

Dial Style - LBF

Model	Capacity	
DG-200	200 x 1 lbf	
DG-300	300 x 1.5 lbf	
DG-400	400 x 2 lbf	
DG-500	500 x 2.5 lbf	

Dial Style - KGF

Capacity		

Dial Style - N

Model	Capacity
DG-1000N	1000 x 5 N
DG-2500N	2500 x 12.5 N


Accessories

Part No.	Description	DG-XXXX	Capacity	Thread
SPK-FMG-011B	Flat Adapter		500 lbf, 2.5 kN	5/16-18F
SPK-FMG-012C	Hook, Stationary		500 lbf, 2.5 kN	5/16-18F
NC002500	Hook, with Snap Latch	•	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-008B	Chisel Point Adapter		500 lbf, 2.5 kN	5/16-18F
SPK-FMG-009B	Point Adapter		500 lbf, 2.5 kN	5/16-18F
SPK-FMG-010B	Notch Adapter	•	500 lbf, 2.5 kN	5/16-18F
NC000725	V-Notch Fixture, Large	•	500 lbf, 2.5 kN	5/16-18F
NC000721	V-Notch Fixture, Small	•	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-013B	Extension Rod, 13-inch		500 lbf, 2.5 kN	5/16-18F
SPK-FMG-142	Curved Compression Fixture	•	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-143	Compression Plate, Circular	•	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-144	Palm Fixture	•	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-145	Compression Plate, Rectangular, Large	e •	500 lbf, 2.5 kN	5/16-18F
SPK-FMG-146	Compression Plate, Rectangular, Smal		500 lbf, 2.5 kN	5/16-18F
NC002844	Grasping Cable	•	500 lbf, 2.5 kN	5/16-18F
SPK-DG-HANDLE	Handle Assembly	•	500 lbf, 2.5 kN	5/16-18F
NC002728	DG Series Carrying Case	•		
NC002845	Soft Case Fanny Pack	•		

Standard Accessory =

Optional Accessory = •

Dimensions

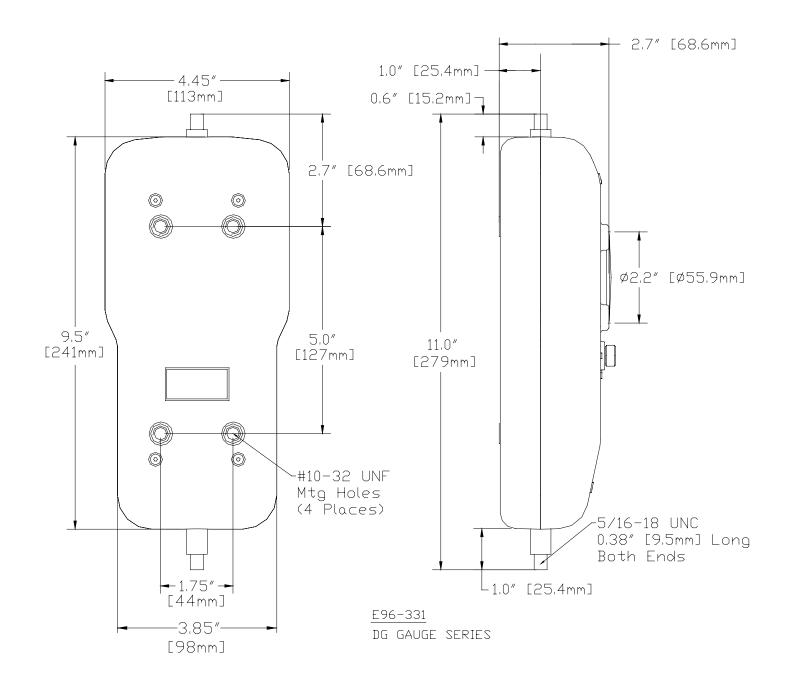



For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

Willrich Precision: Ph: 866-945-5742 email: sales@willrich.com