

Micrometer Micromar 40 AR with spherical anvil



DIN 863-3


Features

- For measuring the wall thickness of a pipe, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel, carbide tipped
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Locking device
- Supplied with: Case, setting standard (measuring range for 25 - 50 mm / 1 - 2"), operating instructions

Technical Data

Measuring range	Readings	Error limit G	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	4 µm	0.5 mm	4134250
25 - 50 mm	0.01 mm	4 µm	0.5 mm	4134251
0 - 1"	.0001"	.00016"	.025"	4134940
1 - 2"	.0001"	.00016"	.025"	4134941

Dimensions in mm	a	b	c
0 - 25 mm / 0-1"	31	25,5	7
25 - 50 mm / 1-2"	56	34,5	12

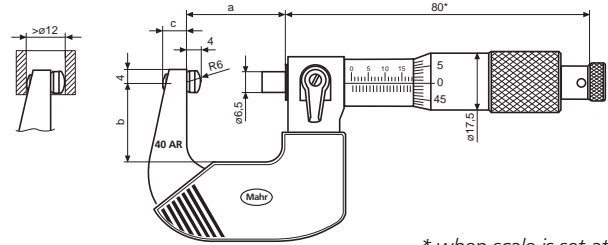

* when scale is set at 0

Micrometer Micromar 40 AW with sliding spindle and disc-type anvils




Features

- For measuring soft materials such as felt, rubber, cardboard, etc.
- Hard lacquered steel frame
- Spindle and anvil made of hardened steel
- Scales with satin-chrome finish
- Heat insulators
- Rapid drive with integrated ratchet
- Supplied with: Case, operating instructions

Technical Data

Measuring range	Readings	Error limit G	Parallelism	Flatness	Spindle thread pitch	Order no.
0 - 25 mm	0.01 mm	8 µm	5 µm	2 µm	0.5 mm	4134300
0 - 1"	.0001"	.0003"	.0002"	.001"	.025"	4134950

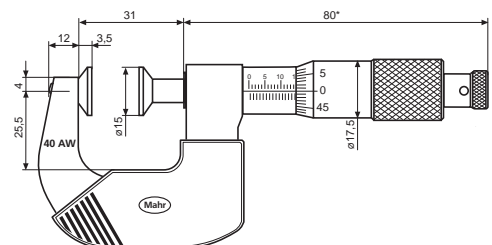

* when scale is set at 0