


subject to technical alterations

type: K  
range: 0 - 100 mm  
range of indication: 0 - 101 mm  
digital step: 0,05 mm  
scale interval: -  
measuring force: 0,8 - 1,8 N  
weight: 660 g

acceptable deviations  
VDI/VDE/DGQ 2618 Bl. 12.1/13.1)  
max. permissible  
errors "G": 0,15 mm  
repeatability "r": 0,1 mm  
reference temperature: 20° C  
operation temperature: 10° C - 30° C  
storage temperature: -10° C - 50° C

scale: 1:2  
drawing-nr.: DAB-K8100-K-e  
date of issue: 05.03.2021  
name: B. Schmidt  
revision status:  
revision date:

interface as accessories available:

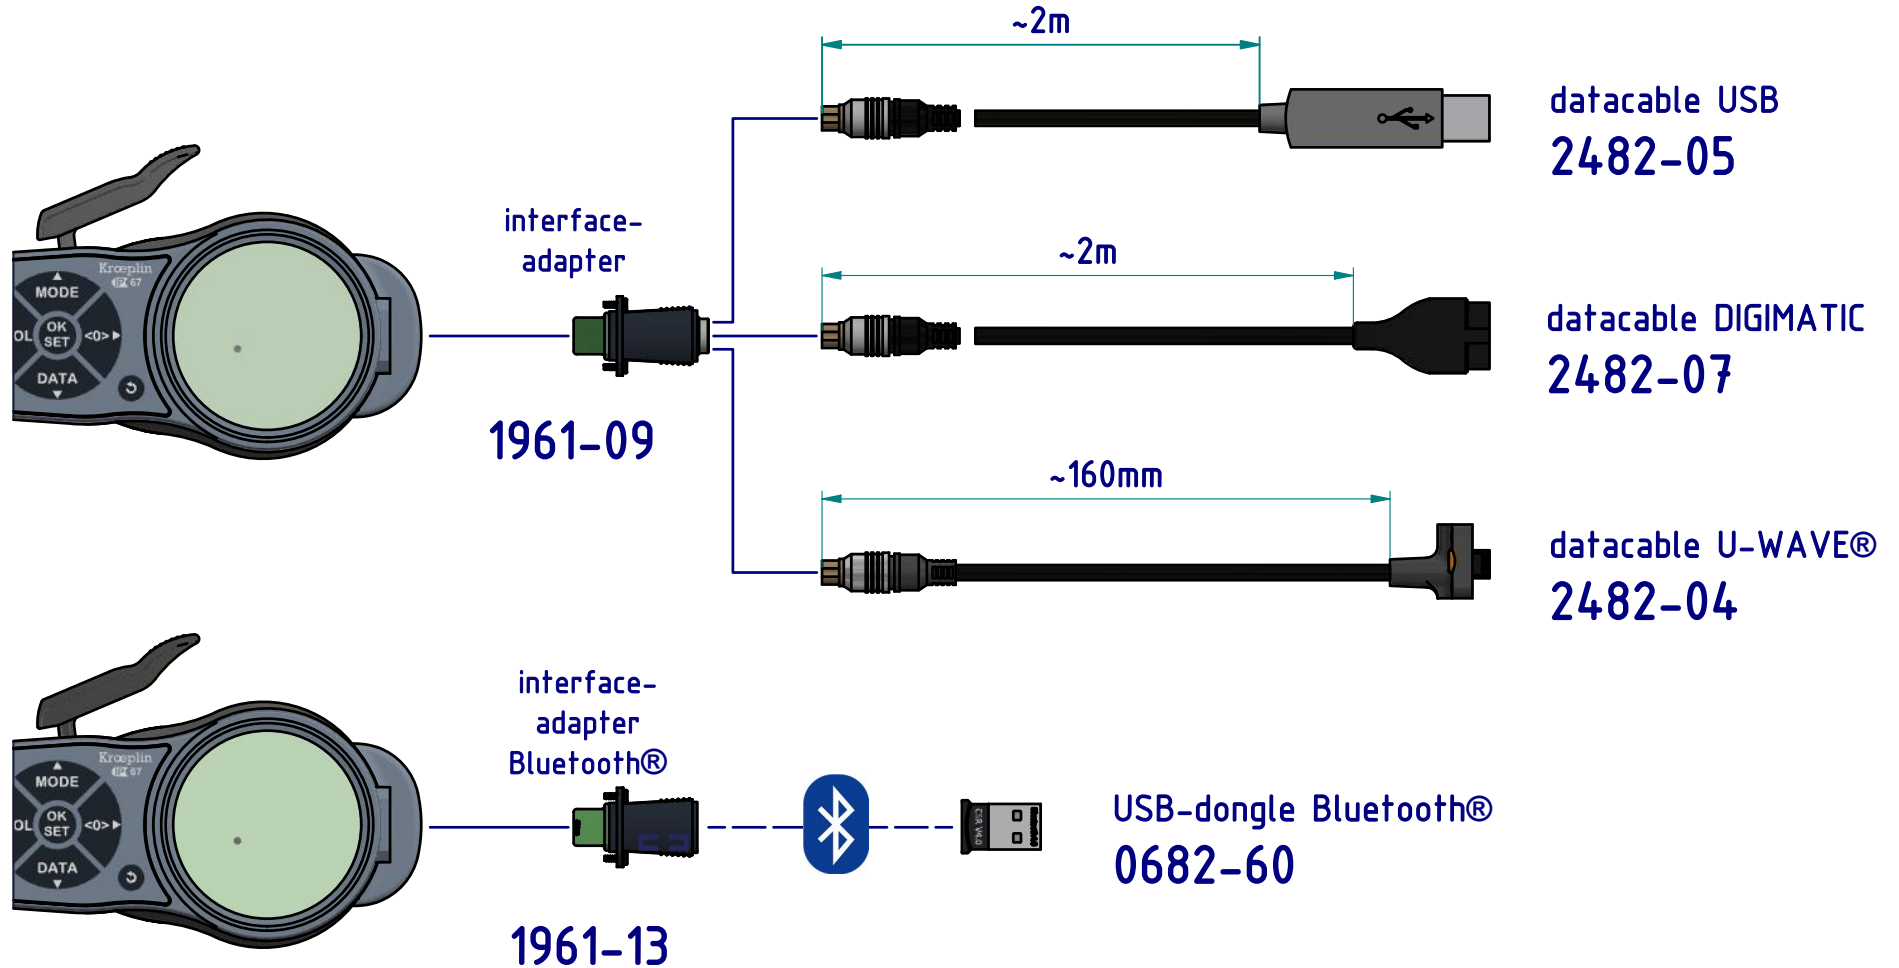

subject to technical alterations



**WILLRICH PRECISION**  
I N S T R U M E N T  
*THINK MEASUREMENT... THINK WILLRICH*

Ph 866-945-5742 email:sales@willrich.com

drawing-nr.:	DAB-K8100-K-e
date of issue:	05.03.2021
name:	B. Schmidt
revision status:	
revision date:	