





Ultra-Cal V Electronic Caliper

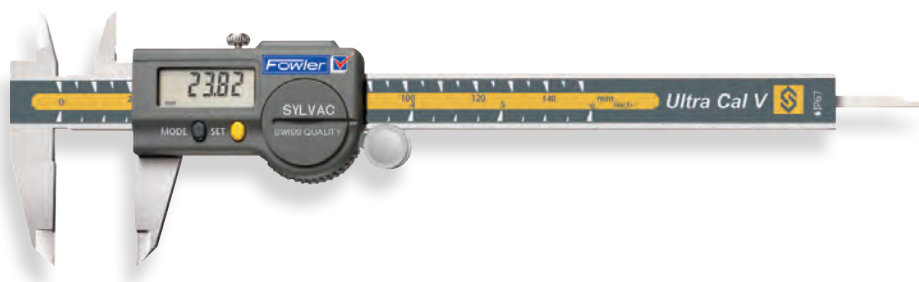

Features:

- Maximum Error: .001"/.02mm
- 4-way measurement, inside, outside, depth and step.
- Resolution: .0005"/.01mm
- Repeatability: .0005"/.01mm
- Direct inch/metric conversion.
- Temperature range 5 to 40C° working; -20 to 60C° in storage.
- Hardened stainless steel construction.
- Direct RS-232 output
- Features Absolute/Relative Measuring Modes.
- Hold function
- Thumbroll (6" model only)
- Includes case.

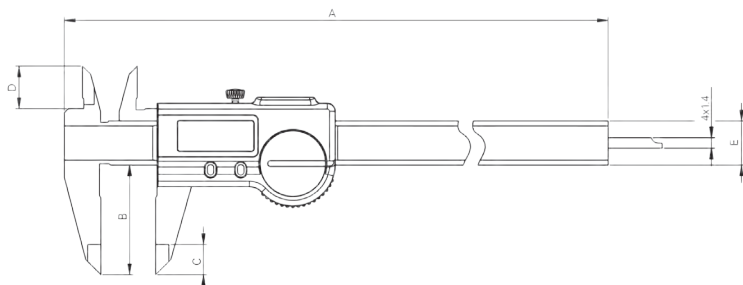

Technical Specifications:

	54-100-067-1	54-100-068-1	54-100-069-1
Measuring range	6"/150mm	8"/200mm	12"/300mm
Accuracy	0.0012"/30µm	0.0012"/30µm	0.0012"/30µm
Resolution	0.0005"/.01mm	0.0005"/.01mm	0.0005"/.01mm
Max Error G (µm)	30	30	30
A (mm)	233	290	387
B (mm)	40	50	64
C (mm)	11	14	14
D (mm)	16	19	19
E (mm)	16 x 3.5	16 x 3.5	16 x 4
Depth rod (mm)	4 x 1.4	4 x 1.4	N/A
Protection Rating IEC 60529	IP67	IP67	IP67
Zero Setting	✓	✓	✓
REL and ABS functions	✓	✓	✓

Part Number	Range	Accuracy	Resolution
54-100-067-1	6"/150mm	0.0012"/30µm	0.0005"/.01mm
54-100-068-1	8"/200mm	0.0012"/30µm	0.0005"/.01mm
54-100-069-1	12"/300mm	0.0012"/30µm	0.0005"/.01mm
Accessories			
54-115-527	Proximity RS-232 Cable		
54-115-526	Proximity USB Cable		
54-100-350	Replacement Battery		

LIFETIME WARRANTY



Top-of-the-line Caliper!

IP67

Fowler
PROXIMITY
INTERFACE

