


## Inside Micrometer Micromar 44 Cms Set

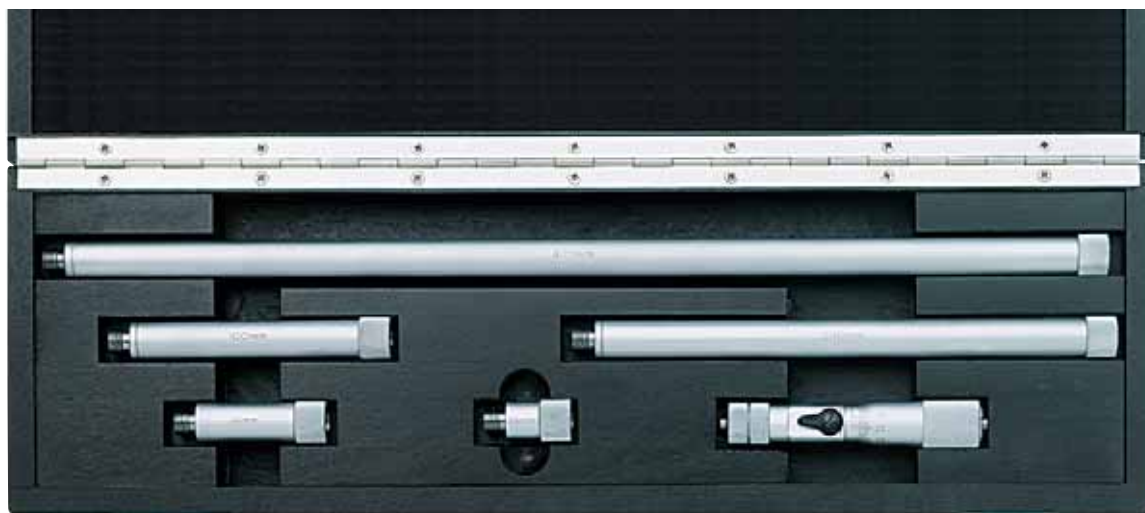


### Features

- Rigid, lightweight tubular construction
  - Spindle is hardened throughout and ground
  - Locking lever
  - Scales with satin-chrome finish
  - Carbide tipped spherical measuring faces
  - Interchangeable extensions 44 Cv with cylindrical gage rods that are spring-mounted in protective sleeves; for the extension of the measuring range
  - Protection sleeves have a satin chrome finish
- Span of error**  
Basic unit 5  $\mu\text{m}$
- Basic unit in combination with any of the extensions  
 $4 \mu\text{m} + 10 \times 10^{-6} \times l$   
( $l$  = length of the combination in mm)
- Supplied with: Case

### Technical Data

Catalog no.	Measuring range	Measuring head 44 Cm	Readings	Spindle thread pitch	Extensions 44 Cv length	Order no.
	mm		mm	mm	in	
					mm	
<b>44 Cms1</b>	100 - 150				25	<b>4168020</b>
<b>44 Cms2</b>	100 - 300				25 / 50 / 100	<b>4168021</b>
<b>44 Cms3</b>	100 - 500		0.01	0.5	25 / 50 / 100 / 200	<b>4168022</b>
<b>44 Cms4</b>	100 - 900*				25 / 50 / 100 / 200 / 400	<b>4168023</b>

\* up to 2500 mm can be achieved with 2 extensions: 44 Cv 800 mm

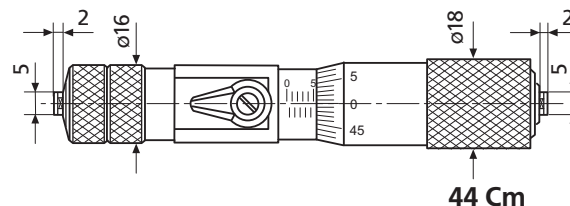

### Accessories

Inside Micrometers, ring gages, etc. please refer to page 3-28