


Inchangeable Anvils for Inside Thread Micrometer Micromar 44 CZ

For pitch, root and outside diameters. Hardened, wear-resistant special steel. With cylindrical mounting shank and retainer ring which ensures locking while permitting rotation in bore of spindle and anvil.

For pitch diameters




Metric thread (60°)					Whitworth thread (55°)					American UST thread (60°)				
Pitch			V-anvil	Tapered anvil	Pitch			V-anvil	Tapered anvil	Pitch			V-anvil	Tapered anvil
mm			Order no.	Order no.	Gänge je Zoll			Order no.	Order no.	range TPI			Order no.	Order no.
0,5	-	0,7	4179400	4173400	40	-	32	4179043	4173443	40	-	32	4179115	4173515
0,7	-	1	4179401	4173401	32	-	24	4179044	4173444	32	-	24	4179116	4173516
1,25	-	2	4179402	4173402	24	-	18	4179045	4173445	24	-	18	4179117	4173517
2	-	3,5	4179403	4173403	18	-	14	4179046	4173446	18	-	14	4179118	4173518
3,5	-	5	4179404	4173404	14	-	10	4179047	4173447	14	-	10	4179119	4173519
5	-	7	4179405	4173405	10	-	7	4179048	4173448	10	-	7	4179120	4173520
7	-	9	4179406	4173406	7	-	4,5	4179049	4173449	7	-	4,5	4179121	4173521
					4,5	-	3	4179050	4173450	4,5	-	3	4179122	4173522
					3	-	2,5	4179407	4179409					

For pitch diameters

Pair consists of V-anvil and tapered anvil.
Shank length 15.5 mm

For outside diameters

Pair consists of V-anvil and pointed anvil. Each pitch requires a separate V-anvil.
The pointed anvil can be used for several pitches.




Trapezoid threads according to DIN 103			Metric thread (60°)			Whitworth thread (55°) American UST thread (60°)		
Pitch	V-anvil	Pointed anvil	Pitch	V-anvil	Pointed anvil	Pitch	V-anvil	Pointed anvil
mm	Order no.	Order no.	mm	Order no.	Order no.	range TPI	Order no.	Order no.
1	4179950	4173650	0,5	4179513	4173220	40	4179730	4173334
1,5	4179951	4173651	0,6	4179514		36	4179731	
2	4179952	4173652	0,7	4179515		32	4179732	
3	4179953	4173653	0,75	4179516		28	4179733	
4	4179954	4173654	0,8	4179517	4173224	26	4179735	4173341
5	4179955	4173655	0,9	4179518		24	4179736	
6	4179956	4173656	1	4179519		22	4179737	
7	4179957	4173657	1,25	4179521		20	4179738	
8	4179958	4173658	1,5	4179522	4173232	19	4179739	4173344
9	4179959	4173659	1,5	4179523		19	4179740	
10	4179960	4173660	2	4179525		16	4179742	
12	4179961	4173661	2,5	4179526		14	4179743	
14	4179962	4173662	3	4179527	4173236	12	4179745	4173348
16	4179963	4173663	3,5	4179529		11	4179746	
18	4179964	4173664	4	4179530		10	4179747	
20	4179965	4173665	4,5	4179531		9	4179749	
18	4179964	4173664	5	4179533	4173236	8	4179750	4173452
20	4179965	4173665	5,5	4179534		7	4179751	
			6	4179535		6	4179753	
						5	4179754	
						4,5	4179755	4173456
						4	4179757	
						3,5	4179758	
						3,25	4179759	
						3	4179760	4173461

Accessories for Micromar 44 Cms / 44 CB / 44 CZ


Individual Extensions 44 Cv

Length a mm	dia. b mm	Order no.
25	15	4167030
50	15	4167031
100	15	4167032
200	15	4167033
400	15	4167034
800	22	4167035

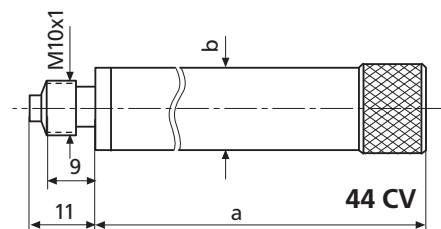

Inside Micrometer 44 Cm

Measuring range mm	Reading mm	Spindle thread pitch mm	Order no.
100 - 125	0.01	0.5	4168001

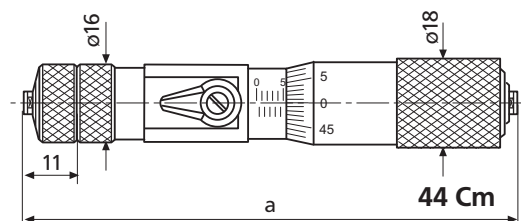

Ring Gage 355 E

Ring Gage 355 E for testing the basic setting see page 13-14

Special wear resistant steel,
hardened and lapped
Dimensions according to DIN 2250 C
Manufacturing tolerance in accordance to DIN 2250
Uncertainty of the engraved actual dimension 1/2 IT1



	Order no.
Case for Inside Micrometer 44 Cm and extension sets Cvs1 or Cvs2	4168015
Wooden case for 2 extensions 44Cv 800 mm	4168016