

Digital Micrometer Micromar 40 EWS with sliding spindle



REFERENCE

Features

Functions:

RESET (Zero setting the display for Relative measurement)
ABS (Switch between Relative and Absolute measurement) mm/inch
Reference-Lock/Unlock
PR (Reference setting)


- Immediate measurement due to the Reference system
- MarConnect data output, choose alternatively USB OPTO RS232C Digimatic

- High contrast Liquid Crystal Display with 8.5 mm high digits
- Hard lacquered steel frame, heat insulated
- Spindle and anvil are carbide tipped
- Spindle is made of stainless steel, hardened throughout and ground

- Ratchet is integrated in the thimble
- Rapid drive
- Supplied with: Case, battery and operating instructions

Technical Data

	Measuring range		Resolution	Error limit G	Spindle thread pitch	Order no.
	mm	(inch)	mm/inch	μm	mm	
40 EWS	0 - 25	(0-1")	0,001 / .00005"	4	0,635	4151724

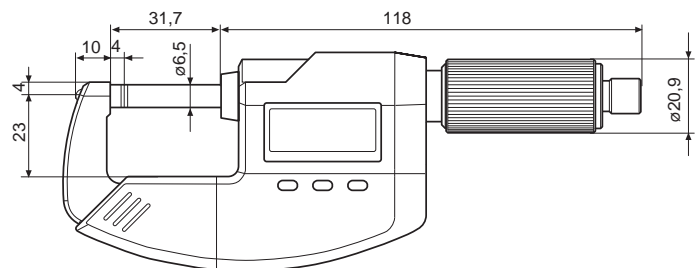

Accessories

	Order no.
Battery 3V , type CR 2032	4102520
Data Connection Cable USB (2 m)	16 EXu 4102357
Data Connection Cable Opto RS232C (2 m), with SUB-D jack 9-pin	16 EXr 4102410
Data Connection Cable Digimatic (2 m), Flat plug 10-pin	16 EXd 4102411

Accessories for Data Processing see Chapter 11