


X-DEPTH 22 Dial Depth Gage

Long range depth gage.

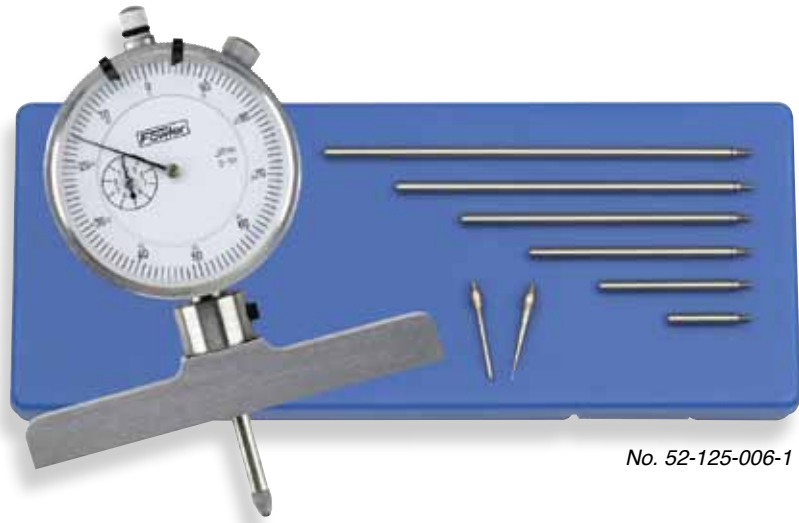

No. 52-125-006-1

Fowler's X-Depth 22 Dial Depth Gage comes with six interchangeable rods with a 0–22" capacity, carbide contact point and 2 extra points for small applications. Provides rapid measurement of hole depths.

Special Features:

- Measurements automatically registered directly on dial face in .001" graduations. The dial indicator can be easily adjusted for zero setting.
- Knurled bezel is easily adjusted with a clamping screw for positive settings.
- 0-1" travel indicator with 3/8" stem.
- The dial indicator has a precision ground hard chrome plated stem.
- Accuracy of the dial indicator meets Federal specifications.
- Rod extensions of 1", 2", 3", 4", 5" and 6" are included. Rods can be connected together for a full 0–22" capacity.
- Includes 2 extra points for small hole applications; one 0.078" dia. x 1" long and one needle point x 1" long.
- Base is hardened steel, ground and microlapped for accuracy. Other portions of the tool are satin chrome finished.
- Standard 4-48 thread removeable carbide ball contact point.
- Rack spindle and pinions are hardened stainless steel to ensure long wear and continuing accuracy.
- Includes shop hardened case.



Part Number	Range	Graduations	Base Size
52-125-006-1	0-22"	.001"	4" x .630"